



SCP-100/110 Resettable Switch Call Point



Special features



- Resettable design, SCP-110 obvious indicators around the edges of the unit.
- Press the pressing plate to enable the output function.
- Pressing plate with status (green and red) shown.
- Reversionary key with non-slip design.
- Built-in buzzer status.

- Input power range from DC12-24V to connect with all types of fire alarm system.
- Easy to assemble, outer case without screws, 3 set of output points to connect other equipment, embedded or surface installations to select. (Note: SCP-100 only has output point function.)

Specification

	SCP-110	SCP-100
Power Supply	DC 12V ~ DC24V ±5%	×
Operation current	DC 12V : 18mA(standby)/75mA(operation)±5% DC 24V : 11mA(standby)/41mA(operation)±5%	×
Buzzer	Set as silent, interval buzzing or continuous buzzing.	×
Indicator	Dual-color (red and green) . Red indicator to set blinking , off or on.	×
Output	N.O. · N.C.& COM. Output (Maximum load of 125V/3A)	
Material	ABS · PC	
Dimensions	90L × 93W × 45H (mm)	
Weight	SCP-100:192g / SCP-110:208g (included wrapping)	


Status

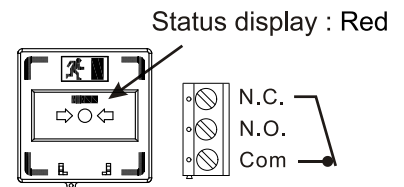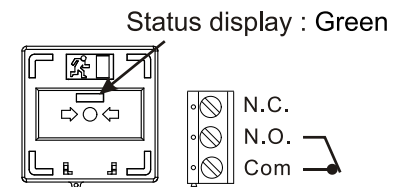

Installation

Embedded Installation

Lateral view

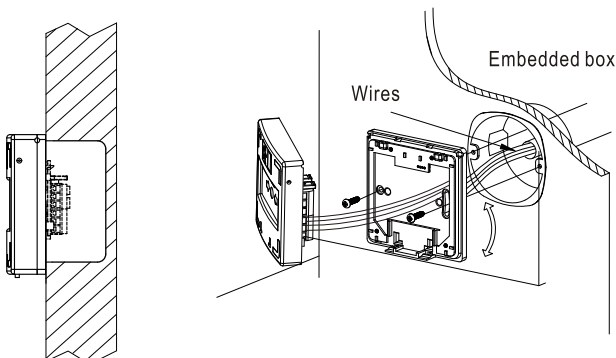

Surface Installation

