



SCP-100/110 Resetable Switch Call Point



Special features



- Resetable design, SCP-110 obvious indicators around the edges of the unit.
- Press the pressing plate to enable the output function.
- Pressing plate with status (green and red) shown.
- Reversionary key with non-slip design.
- Built-in buzzer status.

- Input power range from DC12-24V to connect with all types of fire alarm system.
- Easy to assemble, outer case without screws, 3 set of output points to connect other equipment, embedded or surface installations to select. (Note: SCP-100 only has output point function.)

Specification

| | SCP-110 | SCP-100 |
|-------------------|--|---------|
| Power Supply | DC 12V ~ DC24V $\pm 5\%$ | × |
| Operation current | DC 12V : 18mA(standby)/75mA(operation) $\pm 5\%$ DC 24V : 11mA(standby)/41mA(operation) $\pm 5\%$ | × |
| Buzzer | Set as silent, interval buzzing or continuous buzzing. | × |
| Indicator | Dual-color (red and green) . Red indicator to set blinking , off or on. | × |
| Output | N.O. · N.C.& COM. Output (Maximum load of 125V/3A) | |
| Material | ABS · PC | |
| Dimensions | 90L × 93W × 45H (mm) | |
| Weight | SCP-100:192g / SCP-110:208g (included wrapping) | |


Status

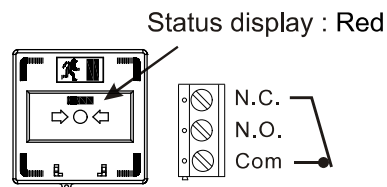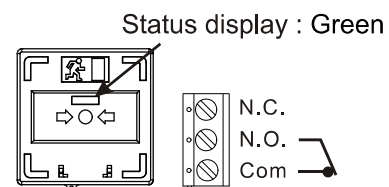

Installation

Embedded Installation

Lateral view

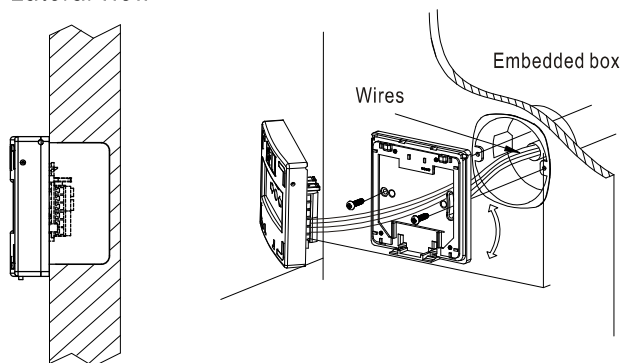

Surface Installation

