



SmartPay™

Full-Service Remote Payment Terminal

Product Overview

ID TECH is proud to introduce the SmartPay™ Remote Payment Terminal- a PCI 2.0 certified, weatherized, remote, self-service payment solution ideal for outdoor, unattended, walk/drive-up applications requiring credit, debit, and loyalty cards. The SmartPay was developed for the quick-service restaurant (QSR) industry, but is designed for use in any application that requires a rugged, remote station-mounted, PCI certified card and PIN-entry device/terminal, including multilane walk-up or drive-up solutions. Designed to integrate with centralized on-site payment infrastructure, its RS232/ethernet interface can be hard wired or connected to a wireless server. The wireless connectivity simplifies installations and maintenance, and speeds up end-user transactions. Its robust design utilizes stainless steel front panels secured to a molded plastic housing, and has a stainless steel backplate for secure mounting.

Applications:

- Quick-service restaurants
- Hospitality check in/out terminal
- Access control
- POS systems
- Parking
- Loyalty

Features and Benefits:

- Fully-integrated unit with dual-headed magnetic insert card reader, PIN pad, and LCD screen
- Proven magnetic insert reader technology with dual-heads for user-friendly card reading reliability
- Five dual color LEDs visually confirm card read status
- PCI 2.0 certified PIN pad
- Customizable APIs for communicating with proprietary applications
- Easy to read four-line, backlit, 20-character LCD screen with four programmable function keys
- High intensity LEDs provide instant customer recognition
- Small footprint
- Contemporary aesthetic design
- Rugged housing stand up to harsh environments, IP65 rated



SmartPay™

Specifications ID-80091001-XXX

Electrical

Power Requirements: 6VDC at 1.5A
Interfaces: RS232

Environmental

Operating Temperature: 32° F to 131° F (0° C to 55° C)
Storage Temperature: -22° F to 149° F (-30° C to 65° C)


Reliability

Operating Life: MagStripe Reader: 1,000,000 cycles minimum
Operations: 1,500,000 cycles minimum
MTBF: More than 100,000 POH calculated

Mechanical

Main Keypad Keys: 0.5 square inch
Operation Keys: 0.5 x 0.6 inch
Main Keypad Key Separation: 0.2 inch
Soft Keys: Sized to fit the LCD bezel
Soft Key Separation: 0.2 inch
MagStripe Reader Height: 2.75 inches
MagStripe Reader Width: 1.5 inches
LCD Display Screen Height: 1.1 inches
LCD Display Screen Width: 3 inches
Weight: <2.3 lbs excluding power supply

Footprint:

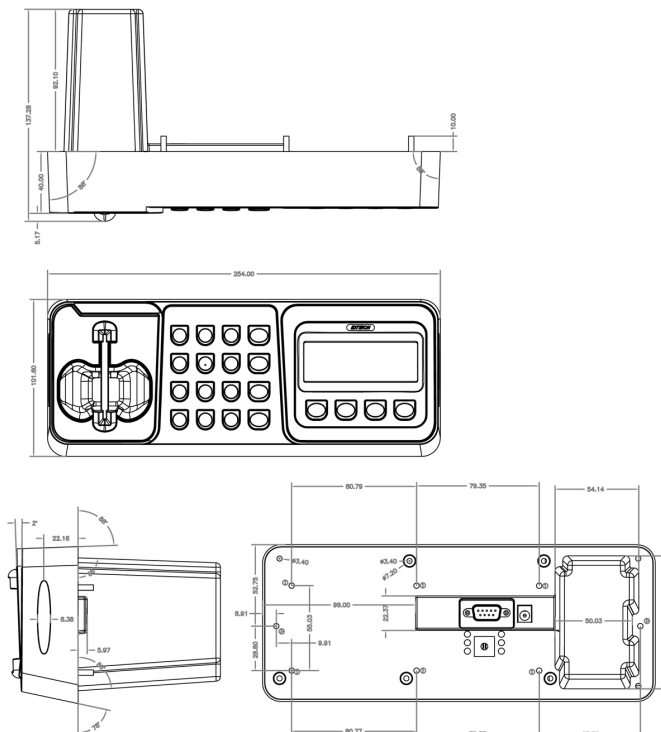

United States Sales Office

Corporate Headquarters

10721 Walker Street
Cypress, CA 90630
Phone: (714) 761-6368
Toll Free: (800) 984-1010
Fax: (714) 761-8880
sales@idtechproducts.com

International Sales Offices

Asia

+866-3-496-6988 (Taiwan)
asia@idtechproducts.com.tw

Canada

+450-465-5261
robertop@idtechproducts.com

South America

+55-11-3079-2255
internationalsales@idtechproducts.com

Europe

Germany & United Kingdom
emea@idtechproducts.com

ISO 9001 Certified



Value through Innovation

www.idtechproducts.com