



S-6000 Digital touchpad lock



The sleek and stylish Schlage S-6000 is packed full of features that give homeowners effortless control over access to their home.

Easy to program, the S-6000 allows up to 8 different user PIN codes and up to 20 credentials to be registered to the device. This means that codes can be created and then deleted for contractors or guests that may need to enter the home on a short term basis.

To operate the lock, owners can use a fob, stick-on patch or card (two of each are supplied with the device). There is also a key for manual over-ride in case of an emergency. The S-6000 also has additional security features such as a built-in alarm which can sense forced entry, and an auto re-locking feature if the door is left unlocked for a period of time.

Another great feature of the S-6000 is the built-in lever which means that other door accessories such as pull handles are not required. The S-6000 also has a panic release feature, which means the door will unlock in an emergency at any time by rotating the lever from the inside.

Features

- Access with PIN, card or fob
- No wiring needed
- Illuminated numeric touchpad
- Can hold 8 PIN codes
- Random PIN number function protects the entry code

SCHLAGE S-6000

0 #

CARD

3

- Built-in alarm senses potential door attacks
- Privacy function access from the exterior can be restricted from the inside
- Auto re-lock
- Weather resistant (tested to IP54)
- Easy to set up and operate
- Volume and mute controls (8 levels)
- Battery powered requires 8 standard AA alkaline batteries
- Emergency 9V battery terminals
- Battery level indicator
- Manual key over-ride
- Panic release handle
- Two year warranty

September 2017



Specifications

Users	8 PINs and 20 credentials can be programmed into the device
Credential verification time	Less than 1 second
Visible/Audible communications	Multi-coloured LEDs and audible indicators
Power supply	8 x AA alkaline batteries (supplied)
Battery life	Approximately 12 months
Operating temperature - exterior	-20°C to 60°C
Operating temperature - interior	0°C to 50°C
Handing	Non-handed
Door thickness	40mm to 90mm
Backset	70mm
Throw latch	14mm
Throw bolt	20mm
Lever	Cast aluminium, Matte Black powder coated
Warranty	Two year mechanical, finish and electronic warranty
Keyway	Yeson

Certifications



 \Diamond

Weather tested


Meets IP54 standard

Electromagnetic compatibility

Meets AS/NZS 61000-6-1 (emission) and AS/NZS 61000-6-2 (immunity) standards

Credentials

Dimensions

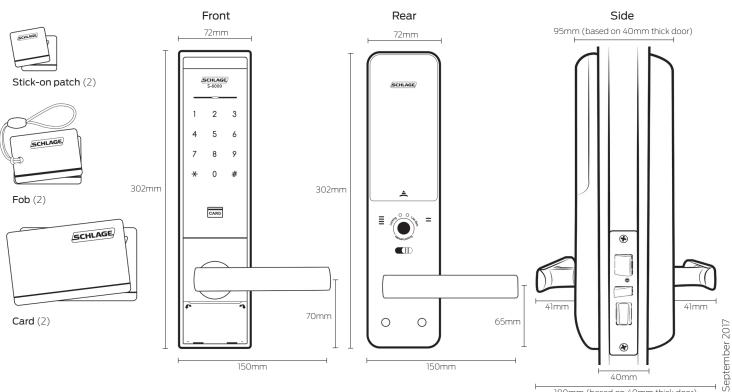



180mm (based on 40mm thick door)



Mortice Preparation


Door Preparation

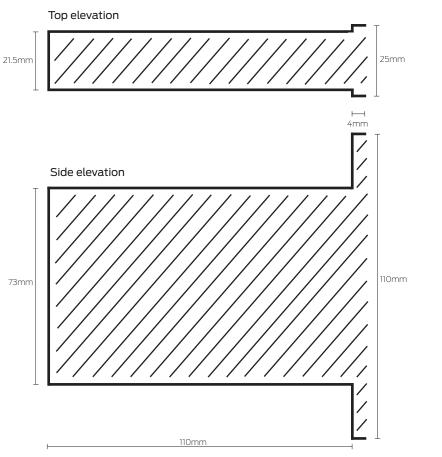

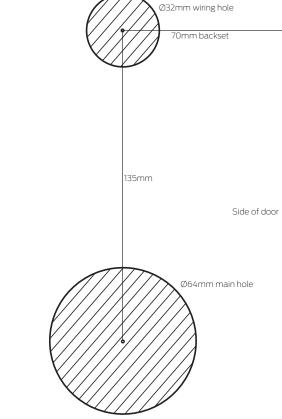


Mortice






Strikes



Strike for aluminium door (part number S-6100)



September 2017